



Halter & auswechselbare Einsätze

Modell	Best.-Nr.	SW mm	L mm	D1 mm	D2 mm	T mm	VE
K3/4-AWE16	250650	16	52	32,0	44	16,0	-
AWE16-A10	250710	10	40	-	-	-	-
AWE16-A12	250711	12	40	-	-	-	-
AWE16-A14	250712	14	40	-	-	-	-
AWE16-A17	250713	17	40	-	-	-	-
AWE16-A19	250714	19	40	-	-	-	-
AWE16-A22	250715	22	40	-	-	-	-
AWE16-A24	250716	24	40	-	-	-	-



Innensechskant Inbus® – normal

Modell	Best.-Nr.	SW mm	L mm	D1 mm	D2 mm	L1 mm	VE
K3/4-A12	250549	12	62	-	44	11,0	-
K3/4-A14	250550	14	62	-	44	11,0	-
K3/4-A17	250551	17	62	-	44	13,0	-
K3/4-A19	250552	19	62	-	44	18,0	-
K3/4-A22	250553	22	62	-	44	18,0	-
K3/4-A24	250554	24	62	-	44	20,0	-
K3/4-A27	250555	27	62	-	44	20,0	-
K3/4-A30	250556	30	62	-	44	20,0	-
K3/4-A32	250557	32	62	-	44	20,0	-



Innensechskant Inbus® – tief

Modell	Best.-Nr.	SW mm	L mm	D1 mm	D2 mm	L1 mm	VE
K3/4-A10-L	250610	10	100	-	44	20,0	-
K3/4-A12-L	250611	12	100	-	44	20,0	-
K3/4-A14-L	250612	14	100	-	44	20,0	-
K3/4-A17-L	250613	17	100	-	44	20,0	-
K3/4-A19-L	250614	19	100	-	44	20,0	-
K3/4-A22-L	250615	22	100	-	44	20,0	-
K3/4-A24-L	250616	24	100	-	44	20,0	-
K3/4-A27-L	250617	27	100	-	44	20,0	-
K3/4-A30-L	250618	30	100	-	44	20,0	-
K3/4-A32-L	250619	32	100	-	44	20,0	-
K3/4-A36-L	250620	36	100	-	44	20,0	-




Innensechsrund Torx® TX – tief

Modell	Best.-Nr.	SW #	L mm	D1 mm	D2 mm	L1 mm	VE
K3/4-T50L	250750	T50	100	-	44	5,0	-
K3/4-T55L	250751	T55	100	-	44	5,5	-
K3/4-T60L	250752	T60	100	-	44	8,0	-
K3/4-T70L	250753	T70	100	-	44	9,4	-
K3/4-T80L	250754	T80	100	-	44	10,5	-
K3/4-T90L	250755	T90	100	-	44	11,8	-
K3/4-T100L	250756	T100	100	-	44	13,1	-



Gummiring und Sicherungsstift

Modell	Best.-Nr.	Größe Zoll	-	D1 mm	D2 mm	-	VE
RS-3/4	250810	3/4	-	-	-	-	5

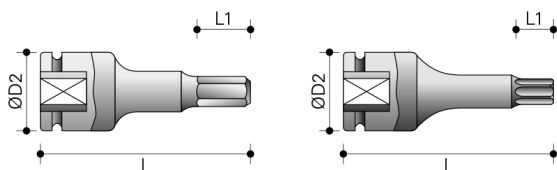

Weitere Infos
auf unserer
Website.

24/7